


GENZ•BENZ


E N C L O S U R E S

SHENANDOAH™ ACOUSTIC 85

OWNER'S MANUAL

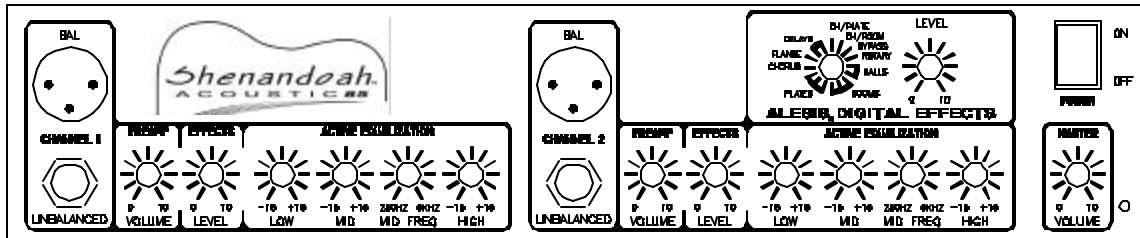

(FRONT PANEL)

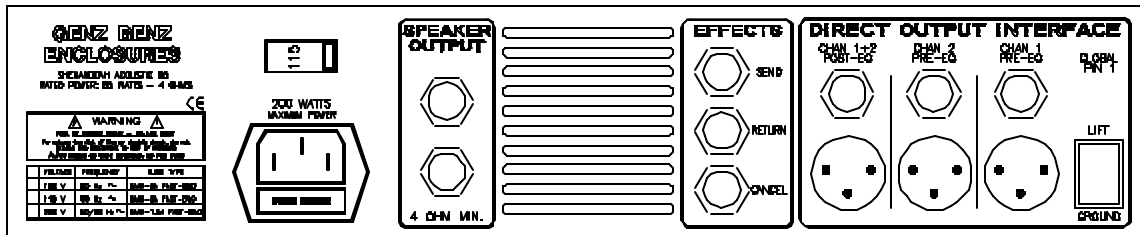

(REAR PANEL)

PRODUCT DESCRIPTION – The **Shenandoah Acoustic 85** is configured as a 2 channel – 4 input 85 acoustic instrument amplifier. Each channel is equipped with both a ¼” unbalanced line input and an XLR balanced microphone input (with phantom power). The 2 inputs on each channel are summed (mixed) together at a 1:1 ratio. Each channel then passes through independent 3 band equalizers with sweep midrange frequency. Equalization centers were carefully selected for use with acoustic instruments. Each channel also contains individual send controls to the on-board Alesis® 15 program digital effects circuit. The channel signals are then summed together, mixed with the digital effects return and passed on to the internal 85 watt power amplifier. The back panel contains 3 direct balanced outputs with ground lift switch, 3 unbalanced line outputs, an effects loop, effects cancel jack, and 2-1/4” speaker jacks.

INPUTS – The Shenandoah™ Acoustic 85 is equipped with 2 types of input jacks. The ¼” input is unbalanced and “line level” with a useable sensitivity from 100 mV to 1 volt. The input impedance is 150 k ohms. The ¼” input will also accept most active balanced line sources, automatically unbalancing them by recognizing the tip portion of the balanced signal. Additionally, the precision input scaling preamp contains a 50 Hz, 12 dB/octave high pass filter (more effective and less intrusive than the more common 6 dB filters) and an “RFI” filter (radio frequency interference) to eliminate unwanted noise. The XLR input jack is balanced and “microphone level”, with a useable sensitivity from –60dBv to –30 dBv. It contains a precision full range differential microphone preamp with phantom power. For use with higher level sources (such as the balanced line level output from a keyboard), a balanced pad network will be necessary to use the balanced input. Phantom power is 13.6 volts, compatible with virtually all commonly used condenser microphones. Dynamic microphones can be used with no ill effect.

COMBINING XLR & ¼” INPUTS – A unique feature of the Shenandoah™ Acoustic 85 is the ability to mix the XLR balanced and ¼” unbalanced inputs on each channel. In many situations, this effectively makes the amplifier function as a 4 channel amplifier. The most effective way to use this feature is to set the volume on the channel using the XLR microphone input and then adjusting the level control on the instrument itself (assuming that it has one) to blend levels between the 2 inputs. Equalization will be common to both inputs on the channel.

ON-BOARD ALESIS® DIGITAL EFFECTS – The Shenandoah™ Acoustic 85 contains a genuine Alesis® 15 program digital effects processor. Unlike other amplifier manufacturer's built-in digital effect units, we chose to use an industry leader in processing with an undisputed reputation for realistic, high quality effects algorithms. Level differences are normal when switching between different effects; just adjust the send and master levels accordingly. The effects level control on each channel adjusts the send level to both the digital effects processor and the ¼" effects return jack on the back panel. The digital effects level in the master section only controls the effects return level from the on-board processor.

EFFECTS LOOP—A parallel effects loop is provided so an out-board effects processor can be used with or in place of the on-board ALESIS DSP unit. The return level from an external processor into the ¼" effects return jack should be adjusted using the controls of the external processor. A ¼" effects cancel jack is provided on the back panel to mute both internal and external effects via footswitch. Any standard single button latching footswitch (with shielded cable) may be used. Signal is muted when the switch is closed. The on-board effects can be turned off by using the program labeled "bypass". All other on-board effects on the Shenandoah™ Acoustic 85 can be used in conjunction with an out-board effects unit plugged in to the effects loop.

ACTIVE EQUALIZATION – Each channel of the Shenandoah™ Acoustic 85 contains a separate 3 band (with sweep mid) active equalizer. These equalizers, similar to those found on professional sound consoles, are very useful tools when used correctly. The corner frequency of the low frequency section is 125 Hz, shelving curve. This frequency is particularly handy when dealing with low frequency feedback from a big dreadnaught guitar. A combination of volume reduction and turning down the low frequency control will generally get good results. Become familiar with the action of the controls since their effective gain range is quite large. The low frequency control is also handy for adding some "bottom" to a baritone sax and "chunk" to a mandolin or mando-cello. The corner frequency of the high frequency section is 8 kHz, shelving curve. This frequency is especially useful for taming the bright harshness of some mandolins, violins, brass and reeds. It can also be used to help acoustic guitars, cellos and flutes cut through other players in loud club situations. The "sweep mid" section features 12 dB of cut or boost with a bandwidth approximately 1 octave wide. The center frequency of this filter is continuously user adjustable from 250 Hz to 5 kHz with a single control. This filter is typically (but not always) used to reduce or remove offending frequencies in the instrument's pick-up response. Removing only the minimum amount necessary will yield the most acoustically rewarding results. The easiest and most repeatable way to determine the offending frequency range is to boost the mid level somewhat (but not to the point of feedback) and while playing, sweep the frequency control slowly across its range. You may need a third hand until it becomes second nature, but soon you will find out just how quick it can be. You will hear a clear and obvious accentuation of the ugliness you want to remove. The ear is a most sensitive and discriminating piece of test equipment when used in this manner, another good reason to protect them! This is the way many touring sound engineers equalize, since it is quick, accurate and repeatable. Occasionally, you will find need to use the mid section in "boost" mode, particularly common when adding higher mids (bite) to an otherwise dull instrument, or adding low mid "body" to an otherwise thin sound. Spend some time experimenting so that the process becomes creative as well as corrective.

MASTER VOLUME – The master volume control adjusts the overall volume of channel 1, channel 2 and the effects return (either on-board or digital). Typically, best results are obtained when this control is operated between the 9:00 o'clock and 3:00 o'clock positions.

DIRECT OUTPUTS – The Shenandoah™ Acoustic 85 contains the most comprehensive direct output section available on any acoustic instrument amplifier. Both XLR balanced and ¼" unbalanced outputs make "real world sense" when connecting with other equipment. The ¼" unbalanced outputs are true professional line level (+4 dBv) with an output impedance of 1k ohm, and can drive virtually any line level input, including power amplifiers. The XLR balanced output is "hot" mic level, rated at –30 dBv. This configuration allows the Shenandoah™ Acoustic 85 to drive very long cable lengths (250+ feet) without problems or added noise. The XLR balanced direct outputs can be "ground lifted" with the global ground lift switch.

This switch lifts pin 1 on all of the XLR balanced outputs to break ground any loops between the Shenandoah Acoustic 85 and a PA system. Separate Channel 1 and Channel 2 outputs are post channel volume/pre effects (to take advantage of the dual inputs on each channel) while the Channel 1+2 output is post master volume/post eq/post effects to aid in sending a "finished" mixed signal to a PA system or external power amplifier.

POWER AMPLIFIER – The Shenandoah™ Acoustic 85 contains an advanced monolithic power amplifier circuit that is completely protected against overloads, short circuits and thermal faults. Output is rated at 85 watts into 4 ohms, with excellent overload recovery characteristics. A unique feature of this amplifier is the “on silicon” temperature sensor that automatically tracks and adjusts the amplifier’s operating and protection parameters, a very cool feature that increases product reliability 10-fold over conventional designs.

SPEAKER OUTPUT JACKS – The Shenandoah™ Acoustic 85 provides 2 parallel ¼” speaker output jacks. Minimum total load is 4 ohms (2 x 8 ohm speaker cabinet or 1 x 4 ohm speaker cabinet) Combo versions of the Shenandoah™ are factory equipped with our GBE 1230, 12” speaker and a compression bullet tweeter presenting an 8 ohm load to the amplifier.

POWER INPUT – The Shenandoah™ Acoustic 85 is shipped from the factory with a standard IEC type power inlet connector and the appropriate power cable for the market the amplifier was shipped to. The power transformer is a universal input (115/230 volt, 50/60 Hz) with a voltage selector switch located above the inlet connector. Be sure that this switch is in the correct position (matching your local power system) BEFORE connecting the Shenandoah to the power source. There is an AC mains fuse (with a spare fuse included!) located in the small slide out tray on the IEC power inlet connector. Always replace with the correct value fuse as indicated on the fuse chart located on the back of the amplifier.

CAUTION!

- Never set an amplifier on anything that will tip over or collapse under its weight.
- These amplifiers are capable of producing sound pressure levels that may cause hearing loss.
- There are no user serviceable parts inside these units. Always consult a qualified repair facility for service.

WARNING!

- The use and operation of this device constitutes an agreement of full release of any and all liability connected with its use. Only persons familiar with the operation of high powered audio equipment should attempt to operate this device.
- In addition, by use of this device, the user agrees to hold Genz Benz Enclosures, Inc. and it’s designers, sales agents and all other affiliates and related parties harmless in the event of any accident, injury, damage or loss resulting from such use.
- Manufacturer’s sole responsibility is to provide a warranty on the specified performance of the product under normal operating conditions for a period of 3 years.

WARRANTY:

- Genz Benz Enclosures, Inc. warrants the model Shenandoah™ Acoustic 85 to be free from defects in materials and workmanship for a period of 3 years from the date of purchase, when purchased from an authorized Genz Benz dealer.
- This warranty does not cover normal wear and tear incurred from the normally designed use of the product.
- This warranty is effective only if a copy of the original sales receipt is presented at the time of warranty service
- This limited warranty is completely transferable to any subsequent buyer as long as the original sales receipt is also transferred to such subsequent buyer.
- All warranty service must be performed by a Genz Benz authorized service center.
- Before returning any unit for service, a returned merchandise authorization number (RMA#) must be obtained by calling 480-941-0705.

SHENANDOAH™ ACOUSTIC 85

ENGINEERING SPECIFICATIONS

INPUTS

XLR Balanced input impedance:	2.2 kohms
XLR Balanced input sensitivity:	-60 to -30 dBV
¼" Unbalanced input impedance:	150 kohms
¼" Unbalanced input sensitivity:	-30 to +4 dBV

AMPLIFIER OUTPUT

Power at 8 ohm load:	60 watts RMS
Power at 4 ohm load:	85 watts RMS
THD + N (preamp):	<0.02%
THD + N (power amp):	<0.05%
Frequency response:	20 Hz – 20 kHz +/- 1dB

CHANNEL EQUALIZATION

Low frequency:	125 Hz shelving, +/-15dB
Mid frequency (sweep):	250 Hz – 5 kHz , peaking, +/-12dB
High frequency:	8 kHz shelving, +/-15dB

DIRECT OUTPUTS

XLR balanced output level:	-30 dBV nominal
XLR balanced output impedance:	150 ohms
¼" unbalanced output level:	+4 dBv nominal
¼" unbalanced output impedance:	1 kohm

EFFECTS LOOP

¼" unbalanced output level:	-10 dBV
¼" unbalanced output impedance:	1 kohm
¼" unbalanced input level:	-10 dBV
¼" unbalanced input impedance:	47 kohm
¼" effects cancel jack:	short T-S cancels return

DIGITAL EFFECTS

Processor type:	Alesis™ DSP engine
Internal processing:	24 bit
A/D converter:	24 bit – 64X oversampling
D/A converter:	24 bit – 128X oversampling
Dynamic Range:	80 dB
THD + N (1 kHz):	<0.01%
Sampling rate:	48 kHz

INTERNAL PRESET EFFECTS PROGRAMS:

- 3 – Plate Reverbs
- 3 – Room Reverbs
- 2 – Hall Reverbs
- 1 – Rotary Effect
- 1 – Chorus/Room
- 1 – Chorus/Plate
- 1 – Chorus
- 1 – Flange
- 2 – Delays (long and short)
- 1 – Bypass

Due to continuing product improvements and changes, all specifications are subject to change without notice

GENZ•BENZ
ENCLOSURES

7811 E. Pierce Street, Scottsdale, AZ 85257 PH: 480-941-0705 FAX: 480-946-2412

Rev 3/26/02